
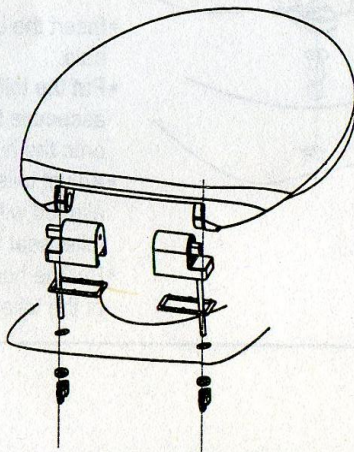


P103



- * Prepare all the seat accessories and hinge accessories group.
- * Put the toilet seat on the toilet bowl, making the bolts aligned with the installation hole of the bowl.
- * Put the bolt through the installation hole of the toilet seat and bowl, make sure the edge of the seat aligned with that of the bowl.
- * Make the washer and nuts aligned with the bolts and fix the nuts.

plumbworld
Big brands, small prices.

Pdf Supplied By <http://www.plumbworld.co.uk/>